

Chain Mower Range

Our chain mowers
reach right in



The path to success starts by listening to your needs.



Fransgård



Fransgård's wide range of chain mowers are designed to meet customers' needs and requirements.

All of the models are built in accordance with the same design principles and by utilising the extensive experience that we have acquired over many years. Two 10 mm "G100" chains are fitted as standard on all machines. It is a very durable chain that at the same time is suitably soft, so that it does not break when it strikes a stone.

The chains can deal with branches up to Ø10 cm in size, and two extra chains can be fitted to deal with extra coarse material or chains can be replaced with 13 mm chains. The chain box is made from high-strength steel, which guarantees long lifetime.

The box is fitted with an extra powerful rubber skirt, which ensures as little material as possible is ejected.

All of the models can be equipped with a chain grid on the front.

(Standard FKR-1501)



FKR-1501 is our top model and absolutely the most flexible chain mower on the market.



The machine operates up to 4.55 m from the centre of the tractor, it can operate in a vertical position at a height of 0–4 m and 35° down. The flexible head means that work can be done on both sides of a ditch from the same side of the ditch. (See table with working range on page 4) The chain mower can work with many different kinds of material, from strong grass to very dense bushes and for example, small wild trees growing along forest roads. It can also be used to cut hedges and branches hanging over roads.

The machine is driven via a PTO shaft and two strong Power belts with three tracks, with double tension function on the long belt.

In the case of operation by a contractor, it is recommended that a wide-angle PTO shaft is purchased, since longer operational time with the machine in the outer positions causes extra wear on a standard PTO shaft. A hydraulic front flap allows larger amounts of material to enter the machine (extra equipment).



Application:
Forest roads
Field roads
Ditches
Watercourses
Road verges
Windbreaks
Stone embankments





FKR-150 is our well-established, best-selling chain mower.



Robust and flexible chain mower that despite a range of 3.25 m from the centre of the tractor, is suitable for work on smaller forest roads and where space is limited. It also deals with ditches, road verges, watercourses and windbreaks from 1.5–3.0 m in height.

It can operate from -35° to +90° (see table on page 4).

The machine has as standard hydraulic side-shift of 90 cm and is driven by a PTO shaft and a strong Power belt with three tracks.



FKR-150BF and FKR-200BF can both be front-fitted or rear-fitted.



FKR-BF is supplied with 150 cm and 200 cm working width. FKR-150BF can side-shift 35 cm on both sides. A machine that provides efficient mowing/clearing of fallow fields, central reservations, unwanted growth on trees in plantations, etc. The machine operates best at 1000 rpm on a PTO and has in-built free-running in the universal joint, which must be replaced if you want to use the machine front-fitted. The universal joint for front fitting is extra equipment.




FKR-125HY is hydraulically driven and requires only 80 l/minute. Free-running is standard.




FKR-HY is stocked with a working width of 125 cm, but can be ordered with a working width of 150 cm.

The machine is equipped with a 64 cc oil engine with valve block for free-running as standard and return hose for the tank. FKR-125HY has a deadweight of 340 kg, and can be used in smaller jib extensions but is also a robust design, so it can be used on excavators, etc. If you wish increased working width and have a jib with a large lifting capacity, using the FKR-150HY is beneficial. This chain mower model provides many options and it is the arm's flexibility that sets the limits of where you can execute the work.


FKR-150

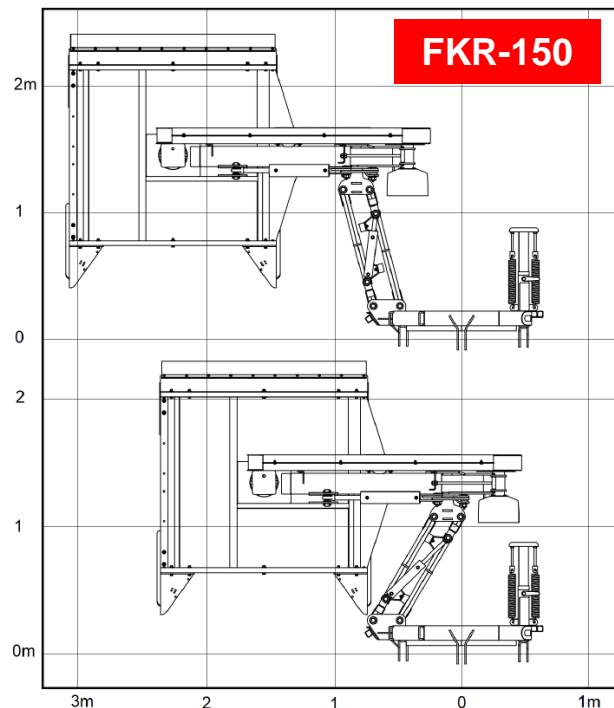

FKR-1501

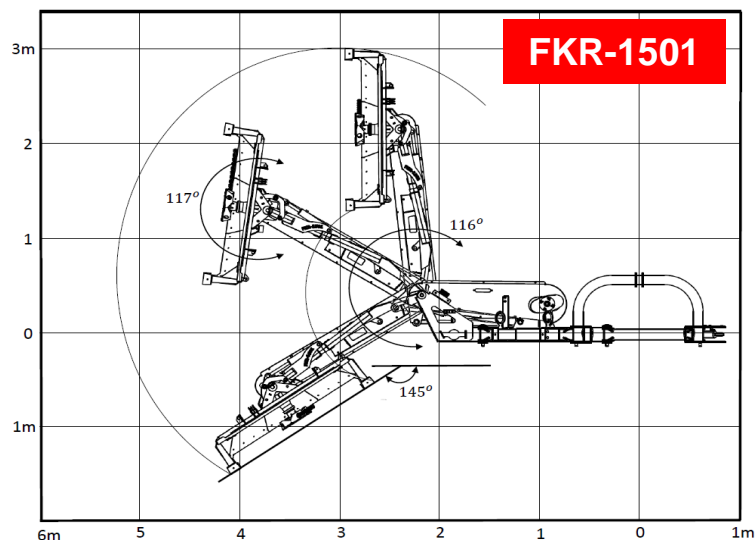

FKR-1501

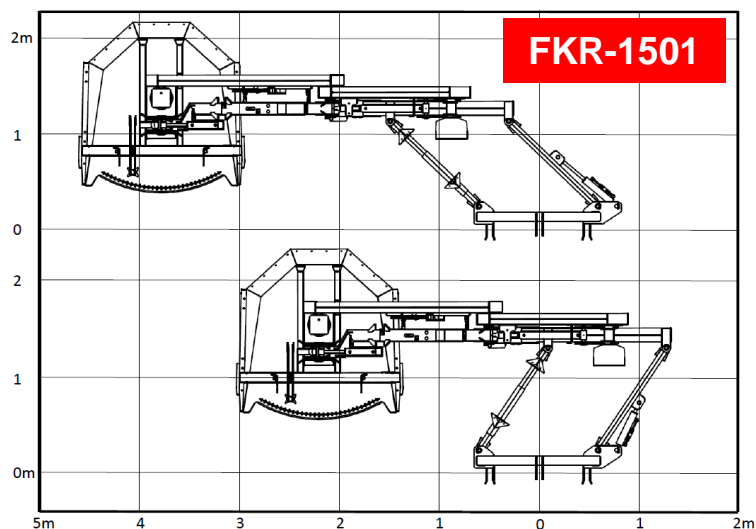

Fransgård continually develops new chain mower models and expands its range of accessories for different models. Fransgård's vision is to be the leading global supplier of chain mowers.

Technical specifications	FKR-125HY	FKR-150BF	FKR-200BF	FKR-150	FKR-1501
Working width	125 cm	150 cm	200 cm	150 cm	150 cm
Total number chains	Qty. 2 or 4	Qty. 2 or 4	Qty. 2 or 4	Qty. 2 or 4	Qty. 2 or 4
Chain dimension	10/13 mm	10/13 mm	10/13 mm	10/13 mm	10/13 mm
Total number guide shoes	Qty. 2 + 2	Qty. 2 + 2	Qty. 2 + 2	Qty. 2 + 2	Qty. 2 + 2
PTO driven	No	Yes	Yes	Yes	Yes
PTO speed		1000 rpm	1000 rpm	540 rpm	540 rpm
Hydraulically driven	Yes	No	No	No	No
Working speed	0–20 km/h	0–20 km/h	0–20 km/h	0–20 km/h	0–20 km/h
3-point hitch		Cat. II/III	Cat. II/III	Cat. II/III	Cat. III
Weight	340 kg	440 kg	556 kg	815 kg	910 kg

Dealer:



Manufacturer

Fransgård Maskinfabrik A/S
Fredbjergvej 132
9640 Farsø
Denmark
Tel.: +45 98632122
www.fransgard.dk